

NoIR

P.O. Box 159 South Lyon Michigan 48178
Phone: 1.800.521.9746 734.769.5565 Fax: 734.769.1708

www.noirlaser.com

Product Specification LaserShield ML1

Customer:	Varied
Product Designation (OPN):	ML1
Luminous Transmittance:	45%
Date of Revision:	2/6/12
Edited by:	David W. Bothner


Graphs represent nominal filter characteristics

L-Rating

190-315 D LB8 + IR LB4
>315-420 DIR LB5
765-1100 DIRM LB5
790-1080 D LB6 + IRM LB7
950-1085 DIRM LB6
775-1085 D LB5 + IRM LB6

Optical Density

190-420nm + 765-1100nm 5+
775-1085nm 6+
790-1080nm 7+

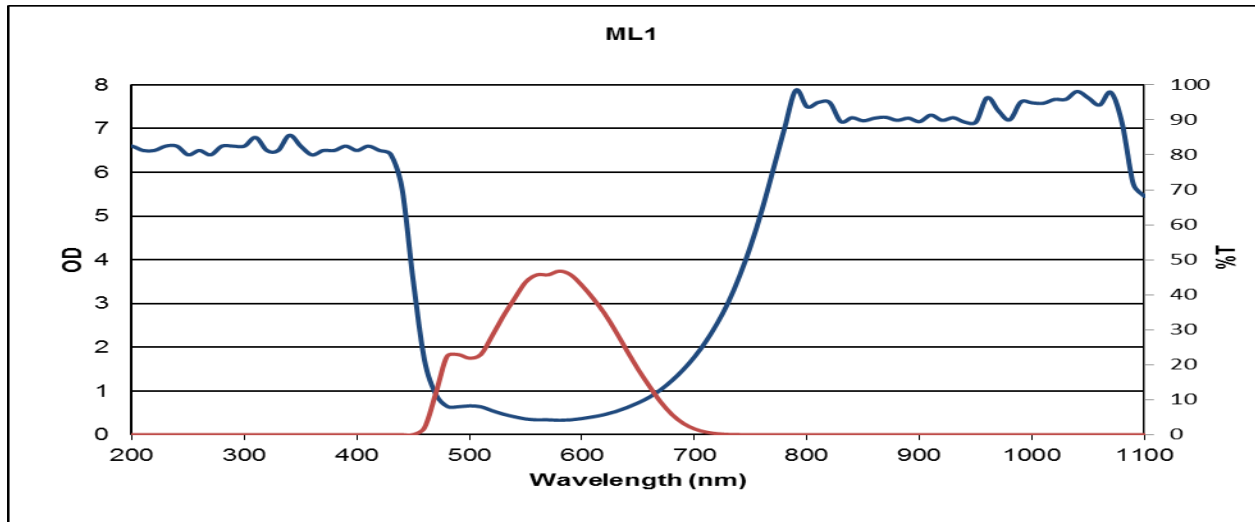

#33 Universal



#35 Wraparound



#34 Wraparound w/Insert



#36 Medium / #38 Large Universal



#50 Goggle w/ Insert



#51 Medium / #53 Large Universal



#52 Wraparound



#55 Wraparound w/Insert



#56 Wraparound



#31 Small / #39 Large Universal



#700 Medium / #900 Large



#60 Goggle